




Mountings	
Recessed in false ceiling with 600x600 panels with visible structure	
Body	
in aluminium extruded, painted with SOLVENT FREE, epoxy polyester powders, thermosetting at 180°C, after phosphate treatment.	
Light emission	
Direct	
Symmetric	
Optical device	
Microprismatic methacrylate diffuser	
Tempered transparent glass shield	
Light source	
CRI ≥ 90	
Lifetime: 50000h L80B10	
Wiring	
Class III rd	
Feeding 220 ~ 240V Ac 50-60 Hz	
Performance data	
Protection rate: IP65	
UGR ≤ 19 (EN 12464-1)	Suitable for environments with visual display units
Normatives	
EN 60598-1	
EN 60598-2-2	
CEI 64-8/7-710	Particular environments and applications and specifically "Medical premises"
CEI EN 60598-2-25	Lighting fixtures for the clinical environments of hospitals and healthcare units
Photobiological safety	
EN 62471	
IEC/TR 62778	
Exempt risk – GR 0	
Directives	
2014/35/UE	
2014/30/UE	
UPON REQUEST VERSION	
DALI dimmable electronic ballast	
Emergency unit: 1h	



K	mA	lm IN	lm OUT	W	COD. ELE
3000	1050	4794	3643	42	9945M53BWWE
4000		4825	3667		9945M53BNWE

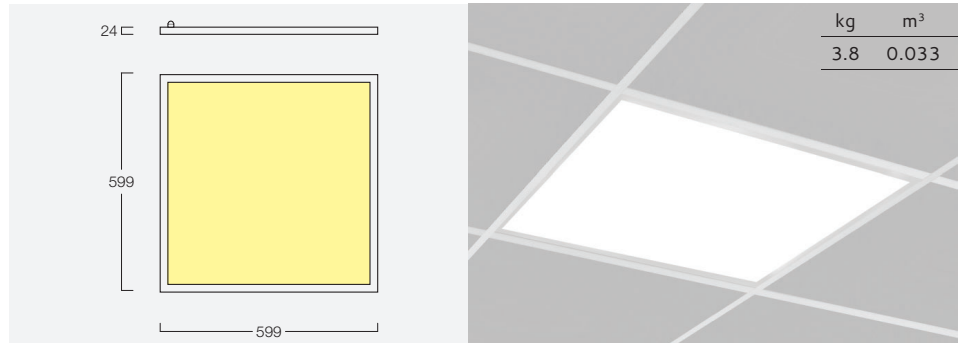